
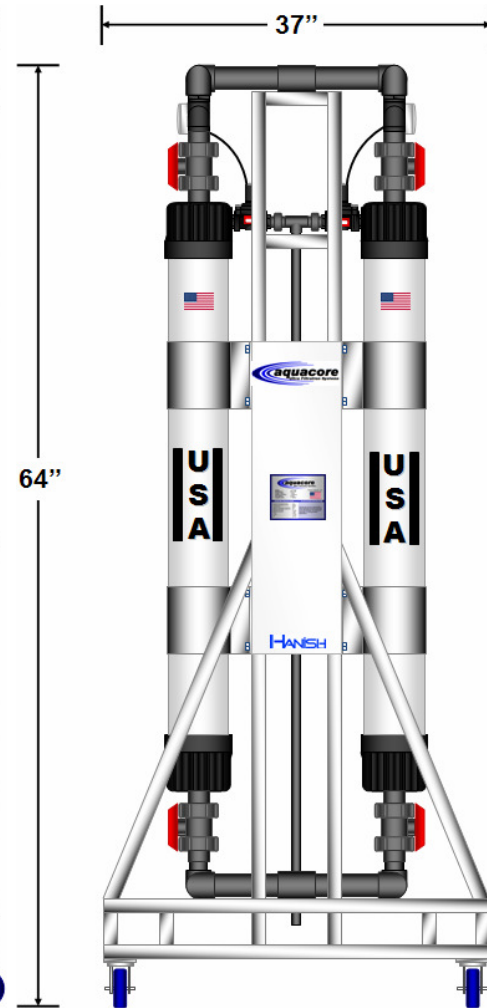


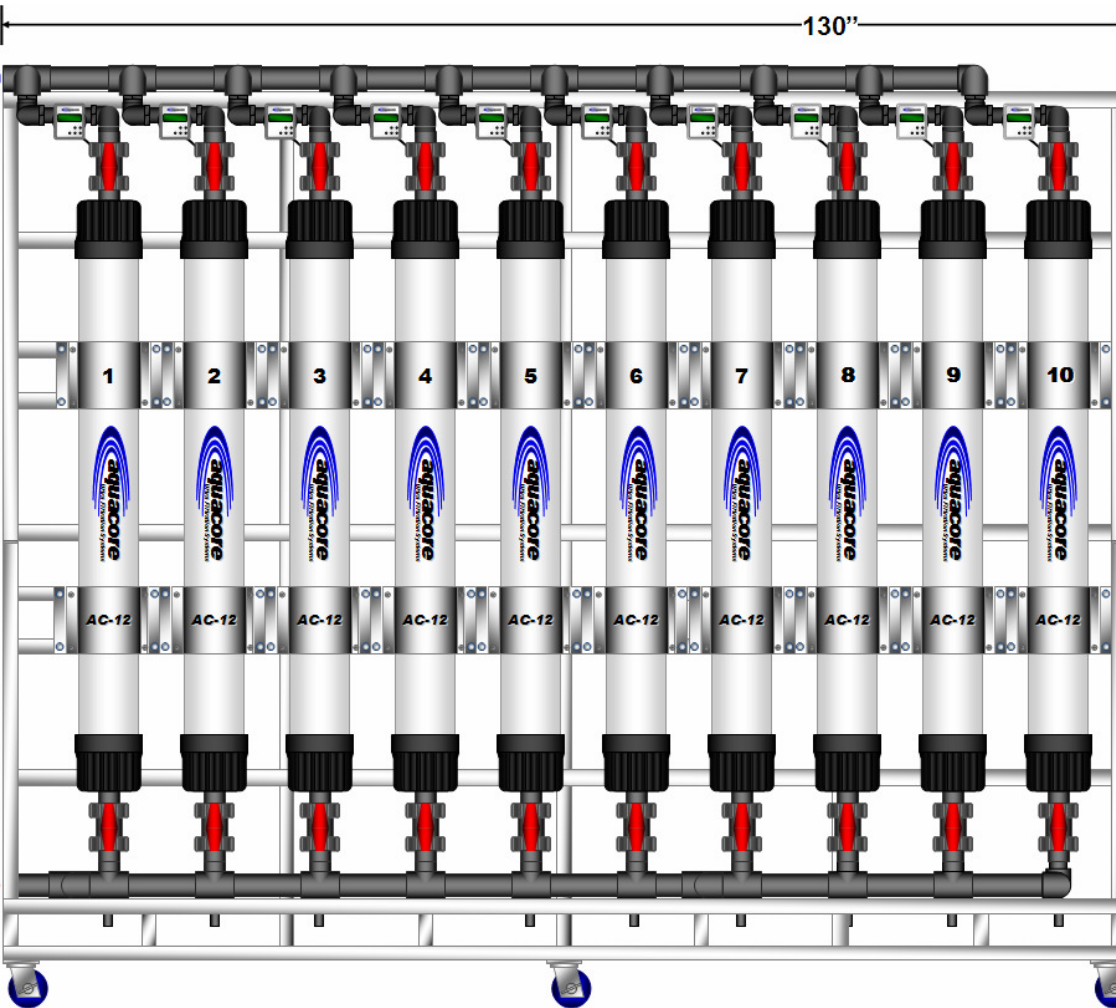


**MODEL:** AC12-440-20  
**DIMENSIONS:** 64 H, 130 W, 37 D"  
**VESSEL SIZES:** 20-4x40"  
**VESSEL VOLUMES:** 30 Gallons  
**DRY WEIGHT:** 1000 Lbs.  
**CONNECTIONS:** 2" IN/OUT

Waukesha, Wisconsin, U.S.A.  
[www.hanishwater.com](http://www.hanishwater.com)


OPERATING SPECIFICATIONS		DO NOT EXCEED SPECIFICATIONS
Minimum Operating Pressure	10 psi	Vessels approved for water filtration. Other applications must be approved by the manufacturer. Do not use for pneumatic or hydropneumatic applications.
Maximum Operating Pressure	100 psi	
Test Pressure	160 psi	
Maximum Operating Temperature	100 F	
Minimum Operating Temperature	40 F	
Maximum Flow Rate	200 gpm	
Service Flow Rate	100 gpm	
Minimum Flow Rate	.1 gpm	
Silica	1 mg/L	
Copper	1.3 mg/L	
Iron	.3 mg/L	
Ph	6.8 - 8.5	

**A Division Of**  
  
**Waukesha, Wisconsin USA**

**Dimensions are for reference only.**  
 This print is the exclusive property of C.Hanish Inc. It must be returned on request along with any documents containing information obtained from this print. Neither this print nor any part of it nor any information concerning it may be copied, disclosed to others or used for any purpose except in furtherance of your business with C.Hanish Inc. The parts referred to on this print may be the subject of patents and/or pending applications and may not be manufactured without permission from C.Hanish Inc.