

WaterCrest 3- TWIN

***The Future Of
Water Treatment!***

Uses No Electricity

Requires No Salt


Has No Moving Parts

Wastes No Water

Uses No Chemicals

Removes Bacteria, Virus, Cysts

Treats Water For Scale

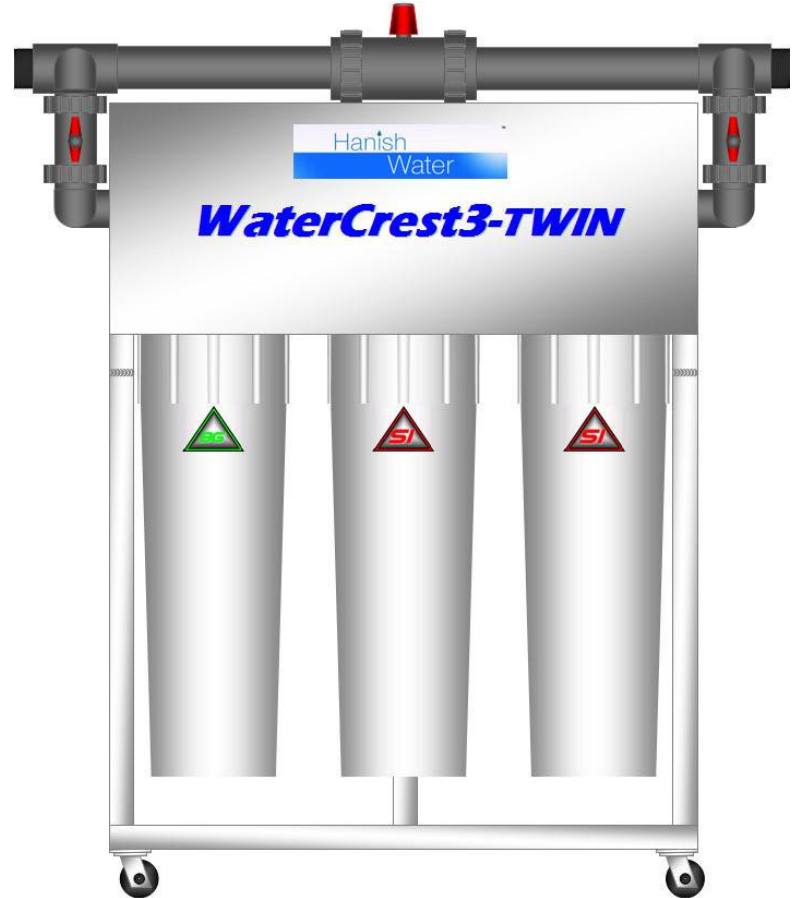


Hanish Water Commercial, Industrial High Purity creates Physical Water Processing Systems that cannot be matched on any level for filtration capabilities, ease of maintenance, and overall efficiency.

For years water softeners, reverse osmosis, and ultrafiltration systems have been the only means of reliably treating water in commercial applications. These are expensive, wasteful, and out dated technologies that require monthly maintenance and care.

HW-520-BG-SI-WC3-TWIN

Recent scientific developments have made it possible to now treat the water at full line inexpensively, efficiently and with no monthly maintenance. These technologies have all come together to form the **WaterCrest-TWIN** full line Physical Water Processing System by **Hanish Water**.

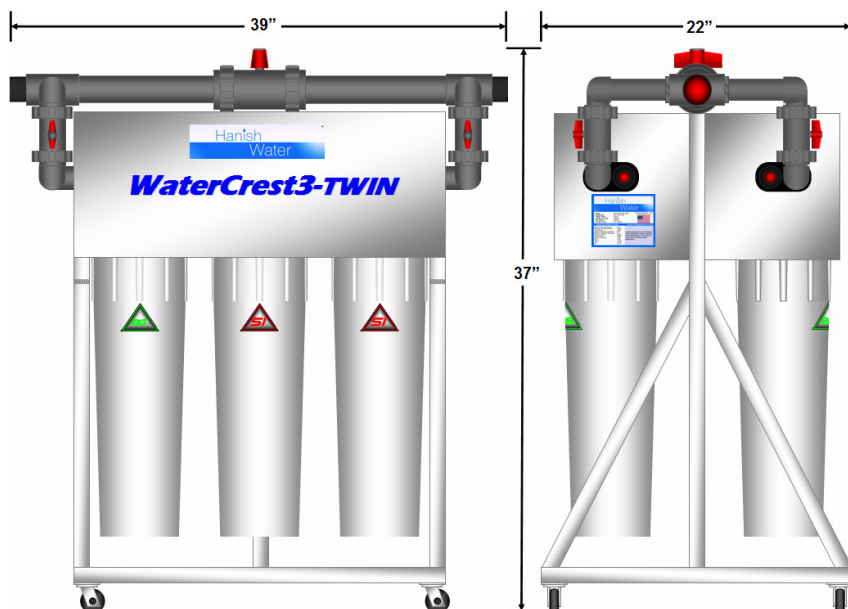

Unlike all other water treatment systems on the market today, the **WaterCrest** treats water for tastes, odors, chlorine and hardness with **NO** electricity, **NO** Drain line, **NO** wasted water, **NO** moving parts, and **NO** salt.

All you get is safe, clean, clear, scale free working and food grade water at every outlet in your facility.

WE DON'T WASTE ANYTHING!

Authorized Dealer

Hanish Water

<p>MODEL: HW-520-BG-WC3-TWIN DIMENSIONS: 36 H, 22 D, 39 W" VESSEL SIZES: 6.5x20" VESSEL VOLUMES: 9 Gallons DRY WEIGHT: 160 Lbs. CONNECTIONS: 1.25" IN/OUT</p>	<p>Waukesha, Wisconsin, U.S.A. www.hanishwater.com</p>
--	--

OPERATING SPECIFICATIONS	DO NOT EXCEED SPECIFICATIONS
Minimum Operating Pressure: 40 psi	<p>Vessels approved for water filtration. Other applications must be approved by the manufacturer. Do not use for pneumatic or hydropneumatic applications.</p>
Maximum Operating Pressure: 100 psi	
Test Pressure: 160 psi	
Maximum Operating Temperature: 100 F	
Minimum Operating Temperature: 40 F	
Service Flow Rate: 28 gpm	
Peak Flow Rate: 36 gpm	
Minimum Flow Rate: 1 gpm	
Silica: 1 mg/L	
Copper: 1.3 mg/L	
Iron: .3 mg/L	
Ph: 6.8 - 8	